

# Installation Guide



## Spring Steer Suspensions

Welded Steer Brackets

**Air-Weigh Customer Support: 888-459-3247**

# Table of Contents

|   |           |
|---|-----------|
| <b>Overview</b> .....                                       | <b>1</b>  |
| Tools Required.....   | 1         |
| <b>Installing Steer Axle Sensor Brackets</b> .....          | <b>2</b>  |
| Preparing the Axle .....                                    | 2         |
| Welding the Bracket.....                                    | 4         |
| Adding a Protective Spray Paint Coating.....                | 5         |
| <b>Installing and Adjusting the Steer Axle Sensor</b> ..... | <b>6</b>  |
| Installing the Deflection Sensor.....                       | 6         |
| <b>Setting the A/D Values</b> .....                         | <b>7</b>  |
| Navigating to the A/D Screen.....                           | 8         |
| A/D Reading is Above 1250.....                              | 9         |
| A/D Reading is Below 750.....                               | 9         |
| Final Sensor Torque.....                                    | 10        |
| <b>Steer Axle Finishing Touches</b> .....                   | <b>11</b> |
| <b>Limited Warranty</b> .....                               | <b>12</b> |
| <b>Procedure for Warranty Claims</b> .....                  | <b>13</b> |

# Overview

See the manuals included with your kit for complete scale installation, calibration and operation instructions. You will need to have your QuickLoad or LoadMaxx display installed or a deflection sensor test box to complete this installation.

See the User Guide to calibrate your scale after installation!

## Tools Required

- Grinder
- Chalk or permanent marker
- MIG or ARC welder
- Torque wrench
- 22mm socket
- Enamel spray paint, any color
- Tape measure
- C-Clamps

## Optional Tools

- Deflection sensor test box, p/n 1001


**Air-Weigh takes no responsibility for damage or failure of the steer axle due to improper welding or failure to follow these instructions.**

**Before calibrating, note that there is a required break-in period. Break-in periods are dependent on a number of factors, including but not limited to: work environment the scale is subject to; road conditions; vehicle conditions; normal wear and tear. This can cause the break-in period to vary from 100 miles to 800 miles. See Setting the A/D Values on Pg. 7, for more information.**

# Installing the Steer Axle Sensor Bracket


## Preparing the Steer Axle Sensor Brackets

1. Locate and mark the center of the steer axle.

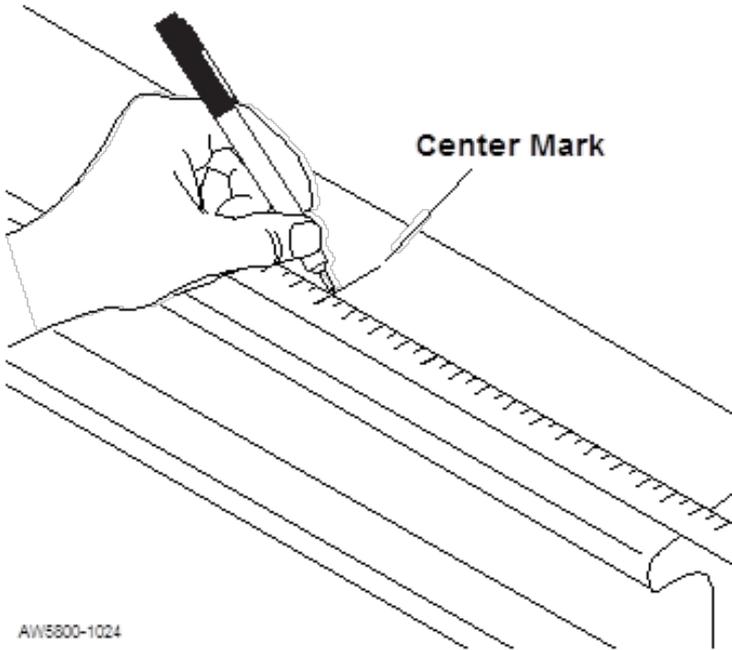

**Marking the Center of the Steer Axle**


2. Using chalk or a permanent marker, mark the top of the steer axle 3" on either side of the center mark (6" in total), and clean this area. If the axle is heavily caked with dirt or grease, use degreaser, such as Brakleen, to clean.
3. Using 40-grit medium sandpaper (or equivalent) or a pneumatic grinder, sand the 6" area until nothing remains but bare metal. We recommend that you partially sand down the casting seam as well.

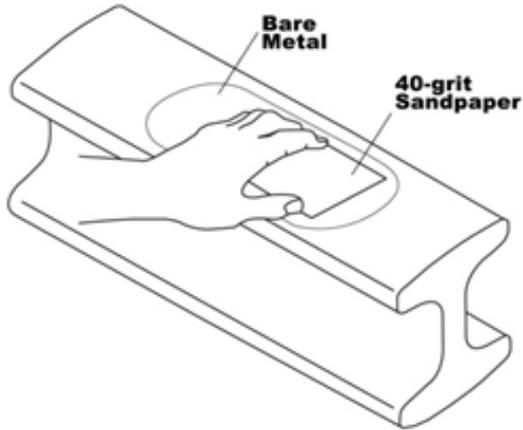

### Sanding the Steer Axle

4. Re-mark the center of the steer axle.
5. Verify that the bracket contact pads fit into the sanded area and that no axle paint is left under the pads. If there is any paint touching the brackets, sand until it has been removed.
6. Once you have prepared the axle, place the bracket assembly onto the axle to ensure that it fits properly. All four bracket mounting pads should sit firmly on the axle without rocking in any direction. If the bracket rocks, sand or grind off any excess axle material until the bracket fits properly.

**Note: Make sure that the main body of the bracket does not touch the axle. Only the feet of the bracket should touch the axle. Using a flashlight to check is recommended.**

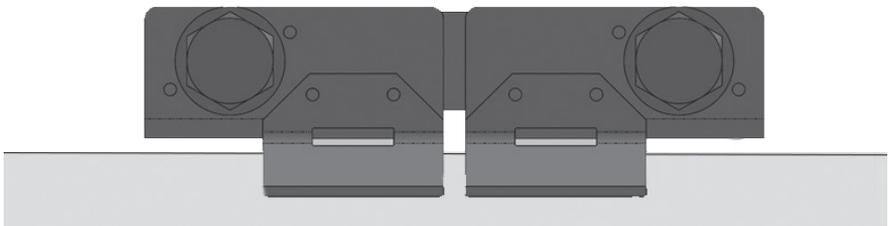


**Axle with only foot pads touching**

# Welding the Bracket


**Note:** Air-Weigh takes no responsibility for damage or failure of the steer axle due to improper welding.

1. Place the bracket assembly at the center of the axle. Use C-clamps (NOT PICTURED) to hold the bracket in place. Make sure you leave the alignment tool in the bracket assembly while welding.

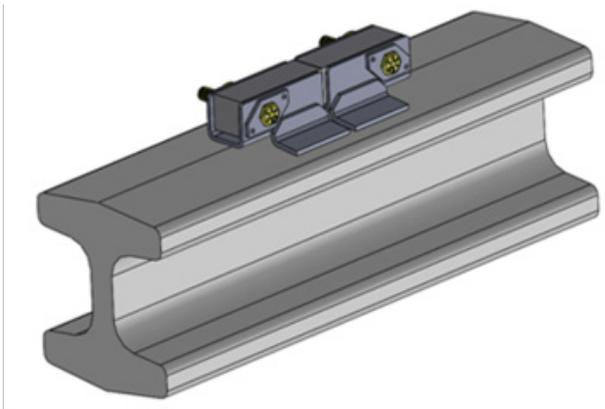

**Bracket Assembly Centered on Axle**

2. Tack weld all 8 corners of the base.

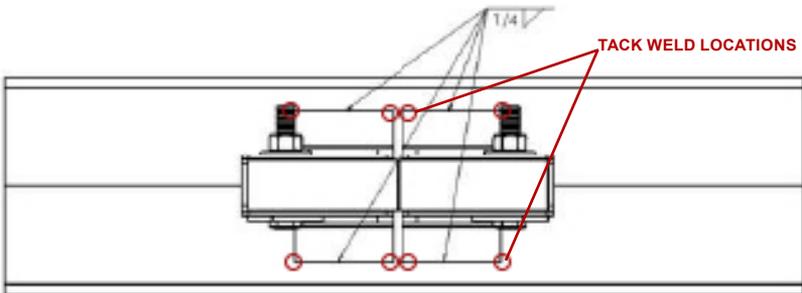

**Bracket Assembly Centered on Axle**


**Note:** Do not operate the vehicle while the alignment tool is still in place.

3. Fillet weld a full bead on the front and back edges of each bracket piece, as per ANSI/AWS 2.4-79, AWS A5.4, AWS A5.9 and AWS A5.22 standards. Do NOT weld the sides of the bracket, only the edges indicated below. Air-Weigh recommends that you use equipment similar to Miller Shopmaster 300 AC/DC; AMP/VOLT setting of 22; wire speed of 3.5; and a welding argon gas mixture of 75/25. MIG welding should use 309 stainless wire. MIG welding will use the same settings as the Miller Shopmaster noted above.

## Adding a Protective Spray Paint Coating

To prevent steer axle corrosion, we recommend you spray paint around the base of the bracket.

1. Using an enamel-based spray paint, paint around the base of the bracket and over the welded section. Paint all bare metal around the bracket completely.
2. Once the paint is dry, we recommend that you paint all exposed metal a second time.

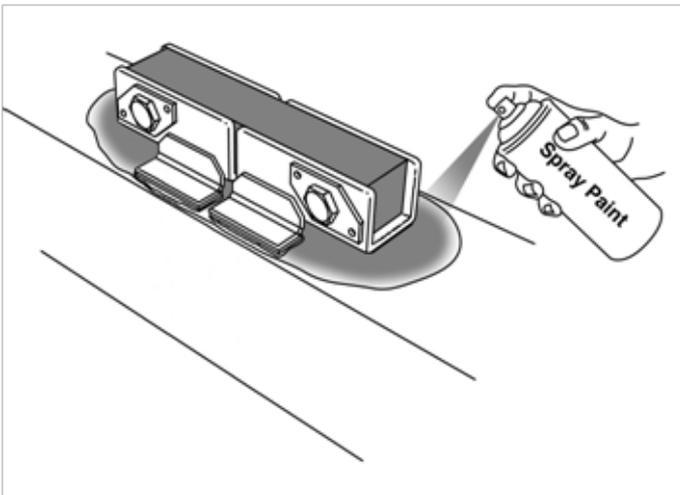


**Spray Paint Coating**


# Installing and Adjusting the Steer Axle Sensor

**NOTE:** Wait for the welds to completely cool before installing the sensor.

## Installing the Deflection Sensor

1. Remove the alignment tool from the bracket. Retain the nuts and bolts.
2. Insert the steer axle sensor with its cable extending toward the side of the vehicle where the sensor extension cable has been routed to the firewall. Make sure the engraved lettering on the sensor faces up.
3. Align the steer axle sensor with the holes in the steer axle bracket assembly.
4. Insert one bolt through the bracket hole on the sensor end with the engraved lettering on it so that the bolthead is secured in the manufactured bolthead holder. Place a washer and a nut at the end of the bolt and hand-tighten the nut. Add Loctite, or equivalent, to the bolts to prevent loosening and corrosion.
5. Insert the second bolt through the second bracket hole so that the bolthead is secured in the manufactured bolthead holder. Hand-tighten the nut. Add Loctite, or equivalent, to the bolts to prevent loosening and corrosion.

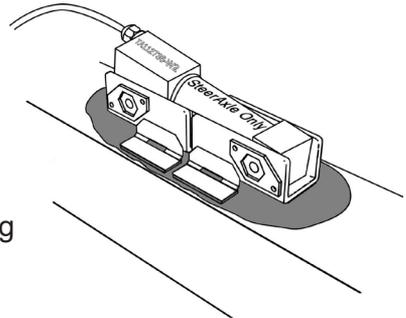

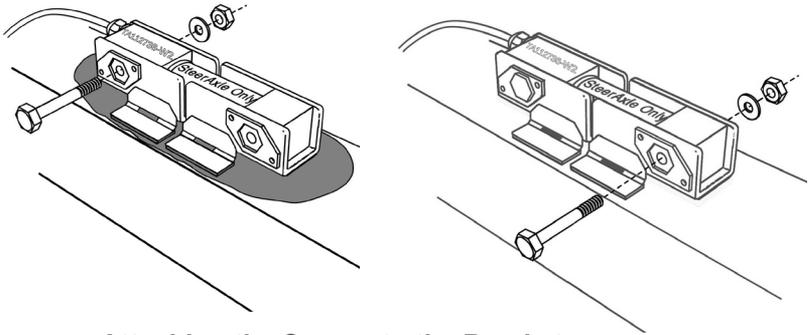

**Attaching the Sensor to the Bracket**

**Note:** When tightening the bolts, **ALWAYS** torque the nut, **NOT** the bolt head. The bolt head should be in the bolt head holder, which is built into the bracket.


## Setting the A/D Values

At this point, you have installed all of the system components. You will next adjust the steer axle deflection sensor to read weight correctly by setting the A/D values. A/D refers to the analog-to-digital conversion of the sensor reading.

This step will require the use of either the in-dash display or the Deflection Sensor Test box (P/N 1001). If using the in-dash display, the scale display must be installed and powered, and the Deflection Sensor Extension Cable must be installed.

1. To assemble the connectors, insert the deflection sensor connector plug into the sensor extension cable connector or connect to the deflection sensor test box. Ensure the locking tabs on the connector plug engage completely.

## Assembling the Electrical Connector

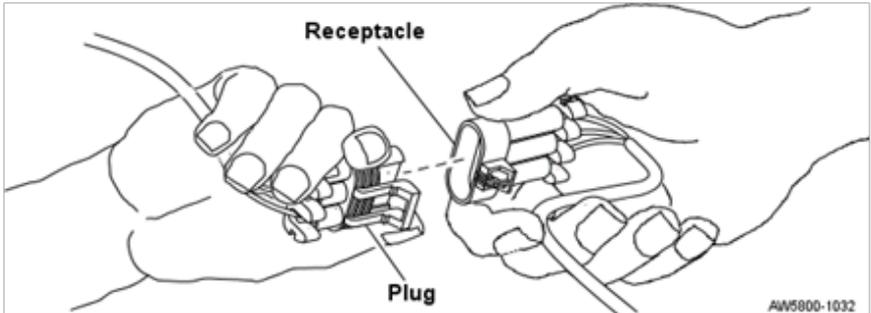

2. Tighten both nuts and use a torque wrench to torque to 60ft-lbs.
3. Verify the A/D reading using the display in the cab (start the ignition to power on the display), or use the deflection sensor test box.

## Navigating to the A/D Screen

### For LoadMaxx Scales

1. Press the escape button until the VIEW WEIGHTS flashes
2. Arrow down to PRINT SETUP and press ENTER
3. Arrow down to SYSTEM DIAGNOSTICS and press ENTER
4. Arrow down to COMLINKS and press ENTER
5. Select A/D READINGS and Select your AXLE GROUP

### For QuickLoad Scales

1. Press ENTER for SETUP/DIAGNOSTICS
2. Arrow down to DIAGNOSTICS and press ENTER
3. Arrow down to SENSORS and press ENTER
4. Arrow down to for A/D READINGS and press ENTER

If the reading is within range (750-1250), continue to instructions for the **Final Sensor Torque**. If the reading is not within range, follow the instructions to adjust the A/D readings below.

## Adjusting the A/D Reading

If the A/D reading is above 1250, follow these instructions:

1. Loosen the nuts on both ends of the sensor.
2. At the plastic nut where the cable enters the sensor, exert **DOWNWARD** pressure with your fingers until the A/D reading is between 750 and 1250. Continue to apply pressure to maintain the desired A/D reading during the torque procedures in step 3.
3. Tighten the nut on the cable end of the sensor and torque to 60 ft/lbs. **Continue to apply pressure with your finger to the plastic nut during torquing in order to maintain the desired A/D reading.** If the A/D readings are still within the 750 to 1250 range after the nuts on both sides of the sensor have been torque to 60 ft/lbs, continue to instructions for the **Final Sensor Torque.**



If the A/D reading is below 750, or there is no A/D reading at all, follow the steps below:

1. Loosen the nuts on both ends of the sensor
2. At the plastic nut where the cable enters the sensor, exert **UPWARD** pressure with your fingers until the A/D reading is between 750 and 1250. Continue to apply pressure to maintain the desired A/D reading during the torque procedures in step 3.

3. Tighten the nut on the cable end of the sensor and torqued to 60 ft/lbs. **Continue to apply pressure with your finger to the plastic nut during torquing in order to maintain the desired A/D reading.** If the A/D readings are still within the 750 to 1250 range after the nuts on both sides of the sensor have been torqued to 60 ft/lbs, continue to instructions for the **Final Sensor Torque.**

### Final Sensor Torque


1. Torque both nuts to **120 ft/lbs.**
2. Perform a final check to A/D values using the readings from the in-cab display, not from the A/D Box. If A/D readings are not within range, repeat the **Adjusting the A/D reading steps.**



**Note:** After final torquing, the sensor will require a break-in period before it can be calibrated. Break-in periods are dependent on a number of factors, including but not limited to: work environment the scale is subject to; road conditions; vehicle conditions; normal wear and tear. This can cause the break-in period to vary from 100 miles to 800 miles. If the vehicle operates on very smooth roads during break-in, more miles may be needed to achieve an adequate amount of suspension vibration.

# Steer Axle Cover Installation

1. Mount the cover over the sensor and the brackets so that the sensor cable is completely under the cover. The sensor extension cable should emerge from the cover's end port on whichever side you choose to route the cable. Ensure that the cable has free play and is not pinched by the axle cover.
2. Very loosely install band clamps around the steer axle on both ends of the deflection sensor cover. Ensure that the band clamp on each side circles both the steer axle and the cover flange.
3. Secure the sensor cable to the axle using zip ties. Run the sensor extension cable along the rear of the axle towards either side of the truck, securing with a band clamp. Use additional 24" zip ties as required to secure the cable to the steer axle.

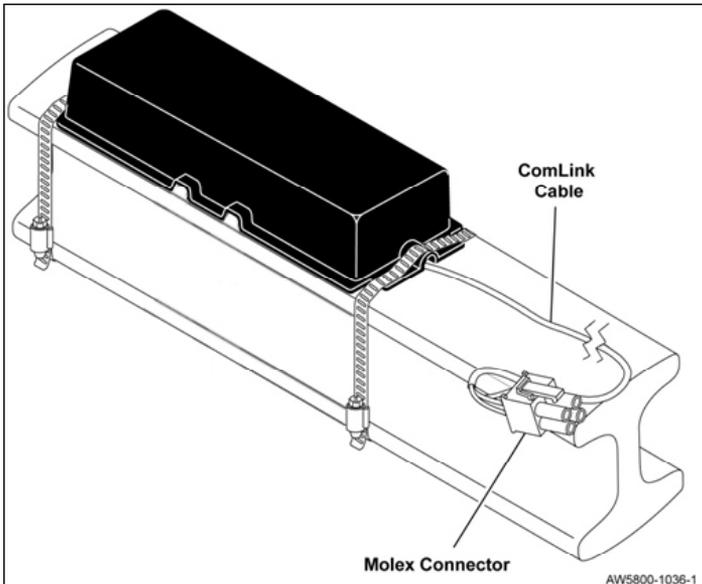

**Cover with Sensor Extension Cable**

# Limited Warranty

Air-Weigh warrants (the "Limited Warranty") that the Products will be free from defects in material and workmanship under normal use and service with proper maintenance for the following time periods:

- (a) for new Scale kits, the Limited Warranty period will be 3 years;
- (b) for new parts and accessories sold separately, the Limited Warranty period will be 1 year; and
- (c) for repaired or refurbished items, including repaired or refurbished Scale kits and repaired or refurbished parts and accessories sold separately, the Limited Warranty period will be 90 days.

If any Product is determined to not conform to this Limited Warranty during its applicable Limited Warranty period, Air-Weigh will, at its exclusive option, either repair or replace the Product.

Limitations of Limited Warranty. Air-Weigh will have no obligation under the Limited Warranty with respect to any product if (a) Buyer fails to notify Air-Weigh in writing during the warranty period of a non-conformity, or (b) Buyer or any other person, entity, or governmental authority uses, misuses, or neglects the product in a manner inconsistent with the product's specifications or directions for use or maintenance, modifies the product or improperly installs, handles, or maintains the product.

**No Repair or Modification of the products.** Except as explicitly authorized or in a separate written agreement with Air-Weigh, Buyer will not service, repair, modify, alter, replace, reverse engineer, or otherwise change any of the products.

**Disclaimer of All Other Warranties.** EXCEPT FOR THE LIMITED WARRANTIES SET OUT ABOVE, NEITHER AIR-WEIGH NOR ANY PERSON OR ENTITY ON AIR-WEIGH'S BEHALF HAS MADE OR MAKES FOR BUYER'S BENEFIT ANY EXPRESS OR IMPLIED REPRESENTATION OR WARRANTY WHATSOEVER, INCLUDING ANY WARRANTIES OF: (i) MERCHANTABILITY; (ii) FITNESS FOR A PARTICULAR PURPOSE; (iii) TITLE; OR (iv) NON-INFRINGEMENT; WHETHER ARISING BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, ALL OF WHICH ARE EXPRESSLY DISCLAIMED. BUYER ACKNOWLEDGES THAT IT HAS NOT RELIED ON ANY OTHER REPRESENTATION OR WARRANTY MADE BY AIR-WEIGH, OR ANY OTHER PERSON OR ENTITY ON AIR-WEIGH'S BEHALF.

## Limitation of Liability.

IN NO EVENT WILL AIR-WEIGH BE LIABLE FOR CONSEQUENTIAL, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, PUNITIVE, OR ENHANCED DAMAGES, LOST PROFITS OR REVENUES, OR DIMINUTION IN VALUE, ARISING OUT OF OR RELATING TO ANY BREACH OF THESE TERMS, REGARDLESS OF WHETHER OR NOT THE DAMAGES WERE FORESEEABLE, WHETHER OR NOT AIR-WEIGH WAS ADVISED OF THE POSSIBILITY OF THE DAMAGES, OR THE LEGAL OR EQUITABLE THEORY (CONTRACT, TORT, OR OTHERWISE) ON WHICH THE CLAIM IS BASED.

IN NO CASE WILL AIR-WEIGH'S AGGREGATE LIABILITY ARISING OUT OF OR RELATED TO THESE TERMS, WHETHER ARISING OUT OF OR RELATED TO BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, EXCEED THE TOTAL OF THE AMOUNTS PAID TO AIR-WEIGH FOR THE PRODUCTS.

THE FOREGOING LIMITATIONS APPLY EVEN IF BUYER'S REMEDIES UNDER THESE TERMS FAIL OF THEIR ESSENTIAL PURPOSE.

# Procedure For Warranty Claims

ALL customers should first contact Air-Weigh Customer Support Department at (888) 459-3247 for questions regarding the use, operation, repair or return of any Air-Weigh product.

In the event Air-Weigh requests to examine the product prior to disposition OR for repair or replacement, Air-Weigh requires a Return Material Authorization (RMA) number be issued before the item is returned. Customer Support will issue the RMA number. Please reference this RMA number in all correspondence.

Claimed items shall be shipped freight pre-paid to:

Air-Weigh  
Customer Support Department  
1730 Willow Creek Circle, Suite 100  
Eugene, Oregon 97402, USA

The Air-Weigh RMA number **must** appear on the outside of the return packaging. Air-Weigh shall examine returned material within 30 days after receipt, or sooner if mutually agreed upon. If Air-Weigh determines that the part or assembly was defective in material or workmanship and within the warranty period, Air-Weigh will repair or replace the part or assembly and return freight pre-paid. In the event Air-Weigh determines that the part or assembly cannot be repaired or replaced and is within the warranty period, a credit not to exceed the purchase price will be issued to the Air-Weigh customer.

For our customers using purchase orders Air-Weigh will process a credit memo and notify the customer by email or fax. The customer will process a corresponding debit memo and notify Air-Weigh accordingly.

If the part or assembly received by Air-Weigh does not meet the requirements of the warranty program set forth above, at the Air-Weigh customer's request the part or assembly will either be discarded, returned freight collect, or repaired or replaced at the Air-Weigh customer's expense and returned freight collect.

# **Air Weigh**

1730 Willow Creek Circle • Eugene, OR 97402-9152 USA  
P.O. Box 24308 • Eugene, OR 97402-0437 USA

Telephone (541) 343-7884 • Order Desk (888) 459-3444  
Customer Support (888) 459-3247 • Fax (541) 431-3121

[www.Air-Weigh.com](http://www.Air-Weigh.com)